

ICE



ASH




SAND



SEAWEED



COAL

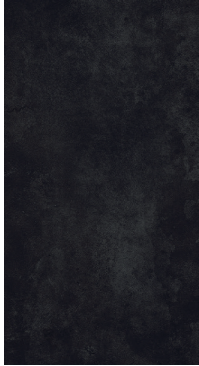

WAVE

Made in USA

2x2 Mosaics, 12x24, 12x24 Deco, 3x24 Bullnose


TILE

AMERICA

SHADE VARIATION

V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.



WEAR CODE

Class 5 Suitable for all Residential and Commercial Application. Class 5 tiles are suitable for all applications including those with heavy traffic and constant use.

PERFORMANCE DATA

Characteristics:	Norms:	Results
Water Absorption	C373	< 0.1%
Abrasion Resistance (Glazed)	C1027	4
Breaking Strength	C648	≥ 400 lbs
Dynamic Coefficient of Friction Wet	AcuTest	> 0.45
Dimensions	C499	Conforms
Chemical Resistance	C650	Conforms
Bond Strength	C482	≥ 200 psi
Resistance to Stains	C1378	Class A
Frost Resistance	C1026	Frost Resistant

Notes:

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile. Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An Appointment



www.tileamerica.com